


2.4G LED RGB Controller



Main Characteristics

V3 RF RGB Remote Control

- Remote Option: RGB
- Working Voltage: 3V DC (Battery CR2032)
- Wireless Frequency: 2.4GHz
- Visual Distance: 30m
- Working Temperature: -20°C-50°C
- Package Size: L150×W46×H18(mm)
- Weight(G.W.): 80g

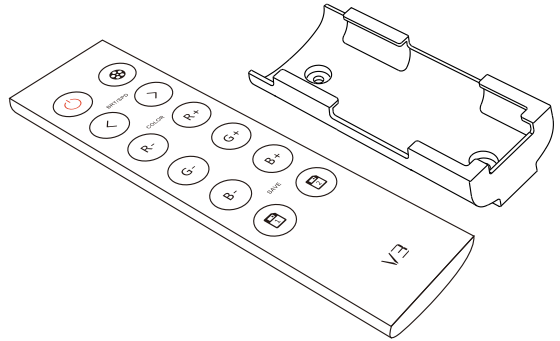


R4-5A CV Receiver

- Input Voltage: 5~24V DC
- Max Current Load: 5A × 4CH Max. 20A
- Max Output Power: 100W/240W/480W(5V/12V/24V)
- Working Temperature: -30°C~55°C
- Package Size: L178×W48×H33(mm)
- Weight(G.W.): 150g


R4-CC CC Receiver

- Input Voltage: 12~48V DC
- Output Voltage: 3~46V DC
- Output Current: CC 350/700/1050mA×4CH
- Output Power: 1.05W~48.3W×4CH Max 193.2W
- Working Temperature: -30°C~55°C
- Package Size: L178×W48×H33(mm)
- Weight(G.W.): 165g


Dimensions



Remote




Holder



Receiver

Operating Instruction for Remote:

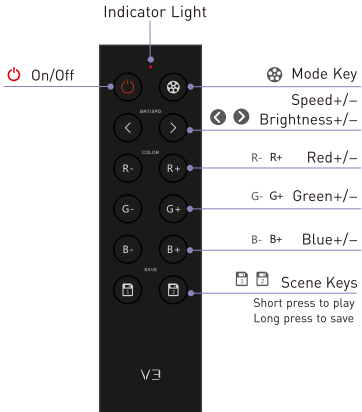

ID learning between the remote and the receiver

Learning ID: Short press "ID learning button" on the R4-5A/R4-CC receiver, the running light keeps on. Then press any key on the remote, the running light on the receiver flicker several times, activated.

Canceling ID: Long press "ID learning button" on the R4-5A/R4-CC receiver for 5s, the running light flicker several times, canceled.

ID Learning between the remotes


Learning ID: Assuming that remote B match up with remote A, first press the two bottom keys of remote B simultaneously until the indicator light keeps on. Then press any key on remote A in 5S. When the indicator of remote B turns off, ID learning is successful.

Canceling ID: Press the two bottom keys of remote B simultaneously [about 6S], the indicator light keeps on, canceled.

The Changing Mode (Press \oplus to Switch)

- A. Static Red
- B. Static Green
- C. Static Blue
- D. Static Yellow
- E. Static Purple
- F. Static Cyan
- G. Static White
- H. RGB Skipping
- I. 7 Colors Skipping
- J. RGB Smooth
- K. 7 Colors Smooth

Operating Instruction for Receiver:



Operation table

OFF	OFF	OFF	ON	ON
350mA	700mA	1050mA		

Wiring Diagram :

